

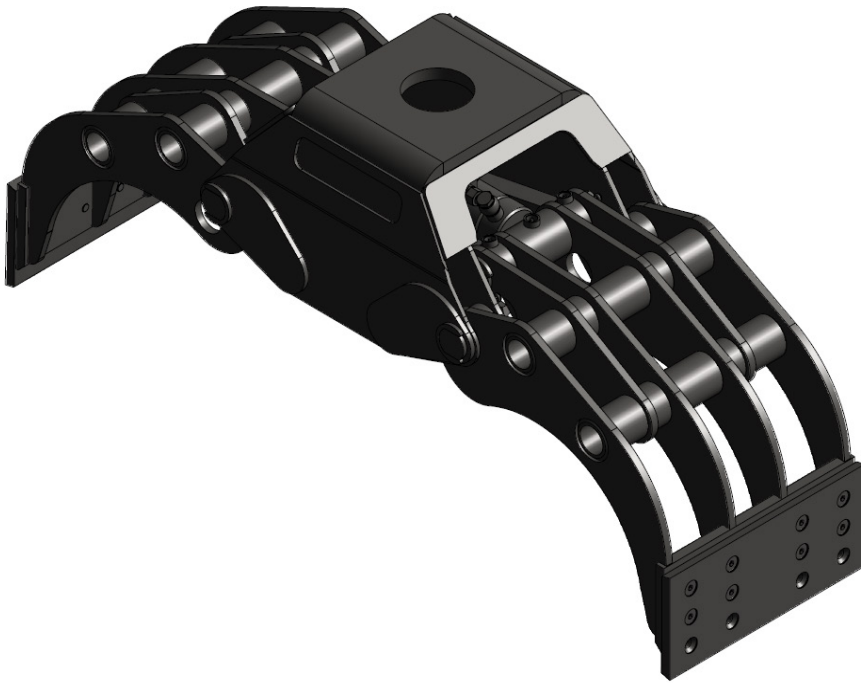


# TIGERGRIP | TG 22 - 42 EG



## KEY FEATURES

- Heavy duty
- Integrated pilot operated check valve and accumulator as standard
- Double guide bars
- Cylinder with double piston rod seals for high pressures
- High tensile wear resistant steel (400 HB)
- Reversible cutting edges in high tensile wear resistant steel (400 HB)

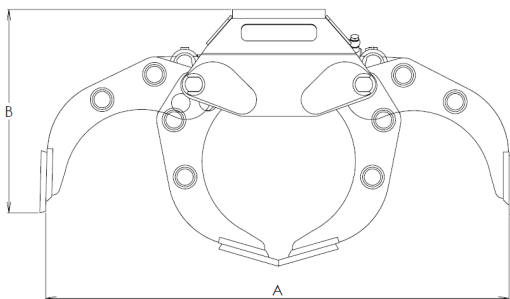

	TG 22 EG	TG 28 EG	TG 42 EG
<b>A</b>	1240	1595	2034
<b>B</b>	550	700	852
<b>C</b>	695	884	1084
<b>E</b>	432	518	533
<b>F</b>	*	*	*

\* hole pattern on demand

## MODEL SPECIFICATIONS



Model	Weight (Kg)	Area (m <sup>2</sup> )	Flow Rate (Bar)	Pressure (l/min)	Force (kN)	Lifting Capacity (ton)	Hydraulic Capacity (ton)	Hydraulic Capacity (ton)				
TG 22 EG	160	0,12	250	40	14	2	10	6				
TG 28 EG	355	0,20	250	50	18,5	5	15	10				
TG 42 EG	500	0,34	250	60	24	8	20	14				

# INTERMERCATO

High performance lift and load attachments for Forestry, Transport, Construction and Recycling.

