


Series | TGR5.6

Excavator weight class: up to 80 t
Short lumber grab

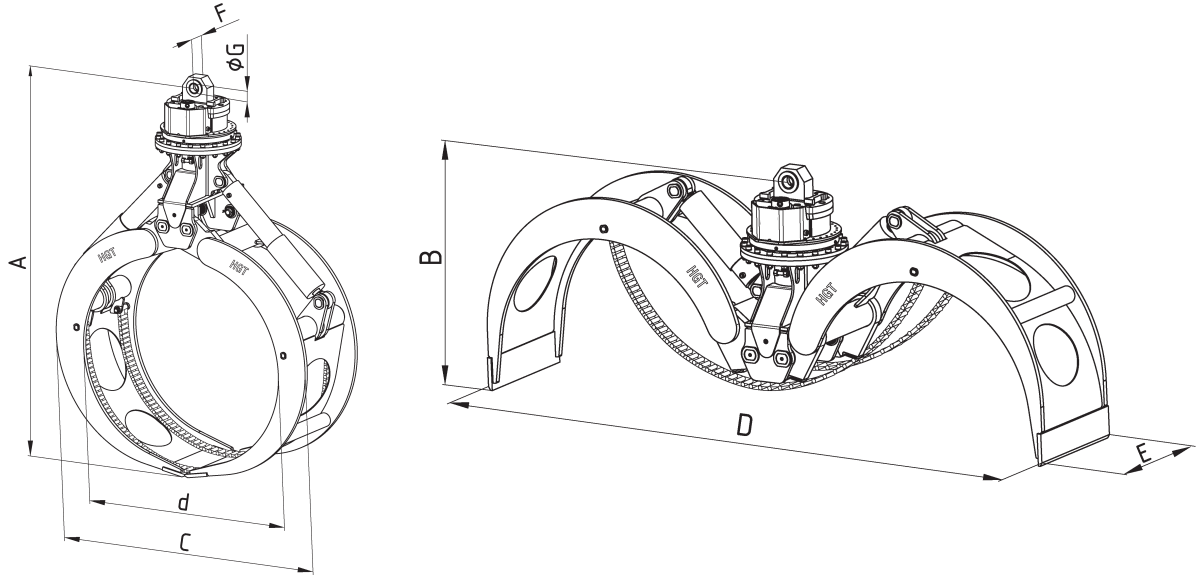

Type	Capacity (m ²)	Weight (kg)	Width (mm) E	max. log length (m)	Dimensions (mm)						
					A	B	C	d	D	F	G
TGR5.6-2500-C	2.5	2790	800	6.0	3205	1590	2520	1930	4190	149	80
TGR5.6-3000-C	3.0	2980	800	5.5	3380	1650	2580	2020	4590	149	80
TGR5.6-3200-C	3.2	3020	800	5.0	3460	1670	2655	2110	4730	149	80
TGR5.6-3500-C	3.5	3180	800	4.5	3555	1690	2725	2180	4890	149	80

As of: 03/2015 • Rev.: J • Subject to technical modifications

Technical specifications | TGR5.6

Excavator weight class	t	up to 80
Max. grab load bearing capacity	t	Grab: 15 / slewing gear: 35
Max. operating pressure	bar	350 (grab function) / 140 (turning function)
Max. speed	RPM	10



|Use: Mobile and chain excavators

Orange peel grab for a short lumber.



|Design features

- Continuously rotatable hydraulic slewing gear
- Base edges made of high-strength fine-grain steel (HB 450)
- Base edges reinforced with weld-on profile (HB 500)
- Hydraulic cylinder with a double dampened end position
- Hose hoop guard for the hydraulic connections on the slewing gear
- Insert chains to keep individual logs from slipping

|Available accessories and equipment

- Hose set and mounting for all known excavator manufacturers
- Load hooks
- HD version with reinforced slewing gear
- Customized and special shells according to customer specifications
- Additional special equipment upon request